WineMaster le temps d'être différent

DESIGN, SILENCE AND SAVINGS

WineMaster[®] offers an «INTEGRATED» version of the air conditioner with a different design and ever more improved efficiency. WINE IN25X is totally discreet, it allows you to air condition up to 25 cubic meters, and it has numerous advantages such as being silent and saving energy.



integrated thermostat



Respectful of the environment

Ideal climate conditions for the preservation of your wine

WINE **IN25X**

THE BUILT IN



WINEIN25X Design, silence and savings

- Keeps cellars at a constant temperature of between 8 and 18 °C*
 Humidity control : excess humidity is condensed and evacuated towards the outside
 Rubber shock absorbers are incorporated, creating an anti-vibration system
 Controlled electrical consumption thanks to the ESM fan on the evaporator side
- Easy upkeep: just a filter that needs to be changed once a year
- 2 year guarantee


OPTIONAL KIT :


- X 2 straight ducts with Ø 125 mm connecting sleeve - length 2000 mm
- 2 X Ø 125 mm support collars
- 2 X single wire Ø 150 mm tightening collars

■ 2 X right-angled connecting pipes with Ø 125 mm connecting sleeve

2 X telescope wall feedthroughs with vented closure flap



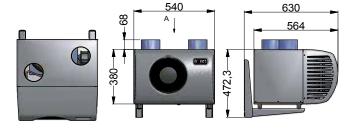






ALWAYS QUIETER **ALWAYS MORE SAVINGS**

In addition to its innovation design, the WineMaster[®] IN25X air conditioner is equipped with high performance technology that is quiet and ensures significant energy savings (up to 30% less consumption compared to standard air conditioners).

THE ADVANTAGES OF THE WINE IN25 AIR CONDITIONER

- Silence, efficiency and savings thanks to new materials
- Vent equipped with «Energy Saver Motor» technology
- Easy to install: ducts come out on top
- New accessory kit: saves time and provides optimal insulation

THE BUILT IN WINEMASTE



REFERENCE	WINE IN25X
Electrical supply	230-240 V - 50Hz
Air conditioning capacity*	Up to 25 m ^{3*}
Overall dimensions	H.540 x W.540 x D.630 mm
Weight	35 Kg
Cooling capacity	500 W at 15 °C
Electrical power absorbed	440 W
Sound level in the cellar (at 1m and 3m)	43 dB / 38 dB
Cellar airflow rate (cold side)	96 m³/h à 198 m³/h
Outside airflow rate (hot side)	450 m³/h
Coolant	R290
Heat resistance	250 W
Maximum outside temperature**	35°C

* With right insulation and adapted to the volume of the cellar.

** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at

12 °C if the outside temperature gets close to 35 °C..

DISCOVER OUR OTHER SPECIAL PRODUCTS : HYGROMASTER[®] & WINEMASTER[®] CELLAR DOOR

HYGROMASTER®

On the wall, on the ground, or on a stable shelf, Hygromaster[®] is very easy to install. You can simply connect it to the water tank that comes with it. This reservoir kit supplies the Hygromaster[®] with demineralized wa-



ter. You can regulate the level of humidity to ensure it is appropriate for your wine cellar.

WINEMASTER[®] CELLAR DOOR

The WineMaster[®] cellar door guarantees the optimal insulation of your wine cellar, a real asset to some of our WineMaster® air conditioners. It is very easy to install with only 7 fixing points for mounting the set and two possible opening versions (right or left).




A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian wineyards, where the wine route starts, that the WineMaster[®] story begins. Our attachment to terroir and our love of wine have always been the source of our thought process and creativity.

Ever since its inception in 1984, the skills and know-how of the men and women of WineMaster® have been at the heart of every step in the air conditioner making process.

Quality and detail are what motivate us, and we are proud of our products and their 100 % Alsatian design.

INNOVATION AND EXCELLENCE ARE WINEMASTER'S KEY VALUES."

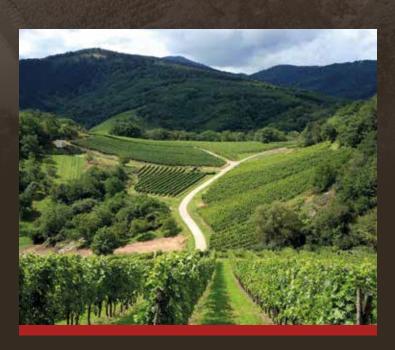



Z.I. VIEUX-THANN ■ 18 RUE GUY DE PLACE BP 60010 ■ F68801 THANN CEDEX Tél : +33 (0) 389 377 515 ■ E-mail : contact@winemaster.fr

www.winemaster.fr